


S 52 SX

SPECIFICATIONS

	U.S.	Metric
Vertical Reach	170' 7"	52 m
Horizontal Reach	158'	48.2 m
Below Grade Reach w/ Tip Hose	131'	39.9 m
Pipeline Diameter	5"	125 mm
Boom Type / Sections	RZ5 Overhead Roll & Fold® / 5	
Boom Rotation	370 degrees	
Unfolding Height	40' 4"	12.3 m
Outrigger Type - Front	Super X, Hydraulic Extension & Jacking	
Outrigger Type - Rear	Hydraulic Slewing & Jacking	
Outrigger Soil Pressure w/o Dunnage (front/rear)	698/616 psi	48.1/42.5 bar
Outrigger Soil Pressure w/ Dunnage (front/rear)	62/55 psi	4.3/3.8 bar
Outrigger Width - Front	29' 3"	8.9 m
Outrigger Width - Rear	34' 4"	10.5 m
Outrigger Length	35' 4"	10.7 m

PUMP SPECIFICATIONS

	U.S.	Metric
Theor. Concrete Output	213 cu yds/h	163 cu m/h
Max. Pressure on Concrete	1169 psi	81 bar
Max. Strokes Per Minute	22	
Max. Aggregate Size	2.5"	63.5 mm
Material Cylinder Diameter	10"	254 mm
Material Cylinder Stroke	98"	2500 mm
Differential Cylinder Diameter	4.7"	120 mm
Maximum Oil Flow	158.5 gal/min	600 l/min
Hydraulic Circuitry Type	MPS	
Valve Type	B Rock	

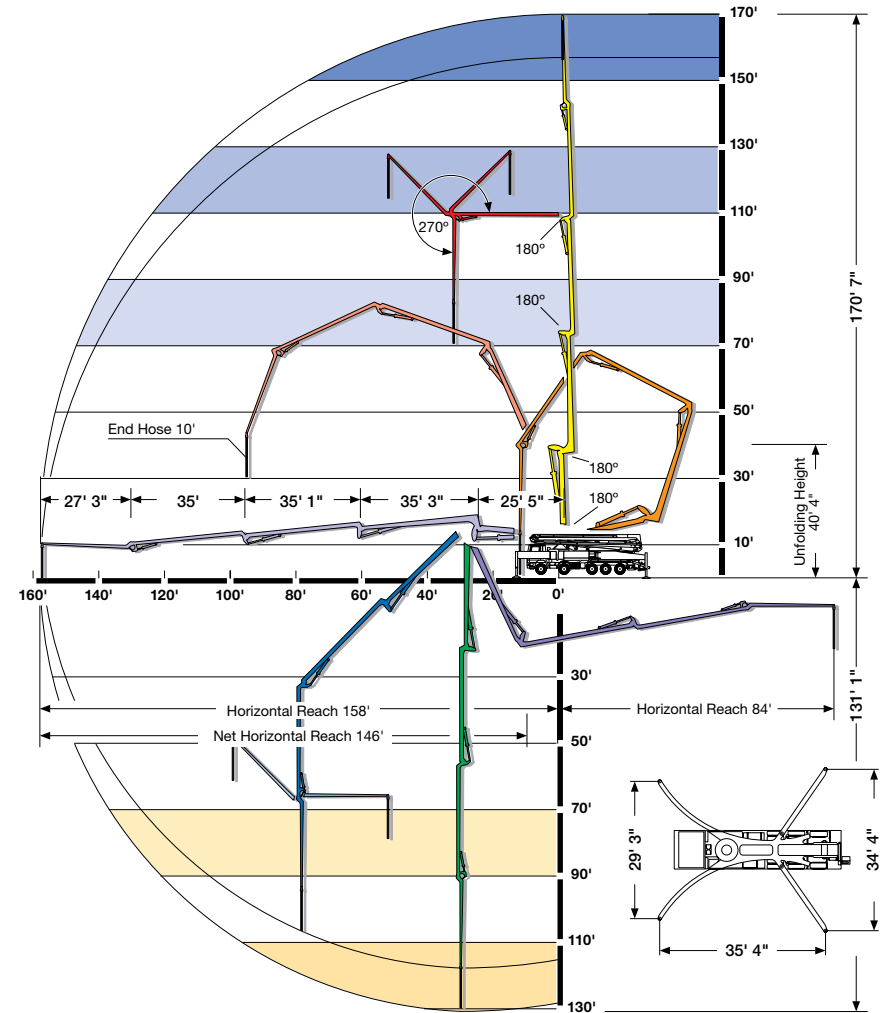

*Pump specifications are for standard units. Other units are available. Specifications are subject to change without prior notice.